

Forest Cranes

MSF 7501 • MSF 9001 •
MSF 12002



MY INNER+
STRENX®



MAXIMUM HORIZONTAL
REACH
7,2m



MAXIMUM VERTICAL REACH
FROM THE GROUND
10,3m



TURNING
ANGLE
420°

MAXIMUM RANGE
CAPACITY



Specifications - MSF 7501

MASAL

Forest Cranes | MSG 7501 | MSF 9001 | MSF 12002

CHECK OUR WEBSITE




BENEFITS

- Greater agility and practicality in handling wood.
- To be mounted behind the cab or on the back of the truck.
- 100% Brazilian origin
- Entirely produced with high resistance Strenx plates, certified by the My Inner Strenx program.

OPTIONS

- Radial shoe ("V" type).
- Scrap Claw -0.23 m³ with 1.75 m opening.

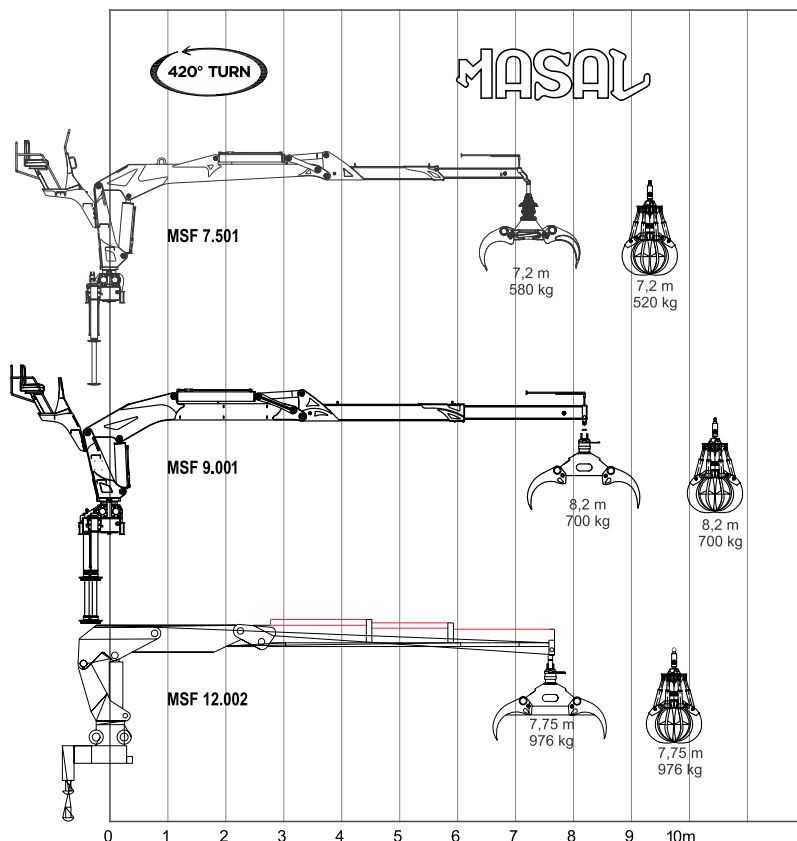

EQUIPMENT CHARACTERISTICS	MSF 7501	MSF 9001	MSF 12002
Payload moment	7.500 kgm	9.000 kgm	12.000 kgm
Maximum working pressure	180 bar	180 bar	180 bar
Oil reservoir capacity	117 L	117 L	117 L
Weight of equipment with grapple	2.196 Kg	2.912 Kg	2.540 Kg
Number of hydraulic lances	1	1	2
Capacity at maximum range	580 Kg	700 Kg	976 Kg
Maximum horizontal range	7.2 m	8.2 m	7,75 m
Maximum vertical reach	10.3 m	10.9 m	10.5 m
Minimum range	0,8 m	1,1 m	1 m
Turning angle	420°	420°	420°
Claw	0,28 m ³	0,36 m ³	0,36 m ³
Mounting space occupied	From 1,1 to 1,6m	From 1,1 to 1,6m	From 1,1 to 1,6m
Recommended minimum PBT	12 ton	12 ton	12 ton


AVAILABLE COLORS

PATTERN

OPTIONS



KNOW OUR PRODUCTS LINES

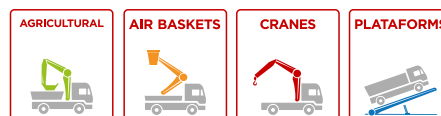

OUR STRENGTH IS TRADITION

MASAL INDUSTRY

Headquarters - Rua Alfredo Caetano,
02 Santo Antônio da Patrulha
Rio Grande do Sul / Brazil

(51) 3662-3066
www.masal.com.br

MASAL