



MS 35000

LOAD CHART

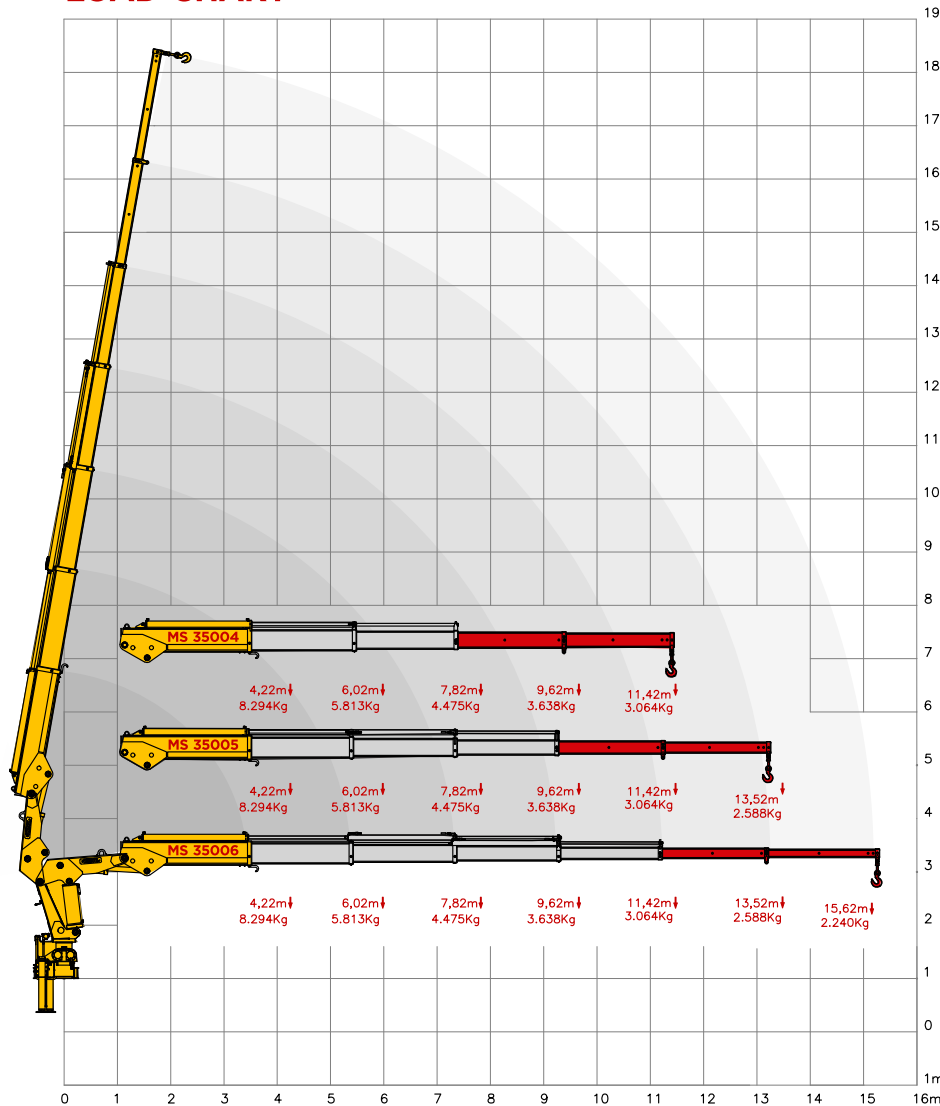

DIMENSIONS

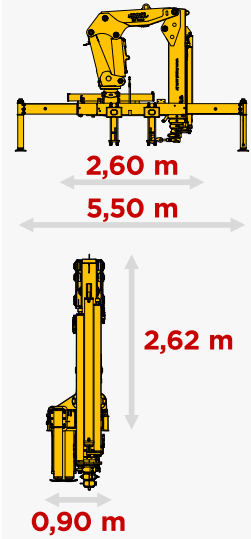

CHECK OUR WEBSITE



TECHNICAL SPECIFICATIONS

		MS 35004	MS 35005	MS 35006
1. Lifting moment capacity	kgf/m	35000	35000	35000
2. Maximum operating pressure	bar	210	210	210
3. Hydraulic reservoir capacity	L	140	140	140
4. Equipment weight	kg	4150	4300	4450
5. Number of hydraulic extensions		2	3	4
6. Quantity of manual extensions		2	2	2
7. Maximum capacity at maximum outreach	kg	3064	2588	2240
8. Maximum capacity at first handle	kg	8294	8294	8294
9. Maximum horizontal outreach	m	11,42	13,52	15,62
10. Maximum horizontal hydraulic outreach	m	7,82	9,62	11,42
11. Maximum vertical outreach	m	14,45	16,45	18,50
12. Maximum vertical hydraulic outreach	m	11,10	12,80	14,80
13. Width in folded position	m	2,60	2,60	2,60
14. Width stabilizer spread	m	5,50	5,50	5,50
15. Maximum opening angle	graus	80	80	80
16. Slewing angle	graus	360	360	360
17. Minimum lifting radius	m	1,90	1,90	1,90
18. Installation space needed	m	1,10	1,10	1,10
19. Slewing torque	kgf/m	5464	5464	5464
20. Dead weight	ton	20	20	20

AVAILABLE COLORS



KNOW OUR PRODUCTS LINES



OUR STRENGTH IS TRADITION

MASAL INDUSTRY

Headquarters - Rua Alfredo Caetano,
02 Santo Antônio da Patrulha
Rio Grande do Sul / Brazil

(51) 3662-3066
www.masal.com.br

MASAL