

Crane MS 6503



**MAXIMUM HORIZONTAL
OUTREACH**
6,02 m



**MAXIMUM VERTICAL OUTREACH
FROM THE GROUND**
8,92 m



**SLEWING
ANGLE**
360°

Specifications - MS 6503


**MAXIMUM EXTENT
CAPACITY**

6,02 m




MASAL

LOAD CHART

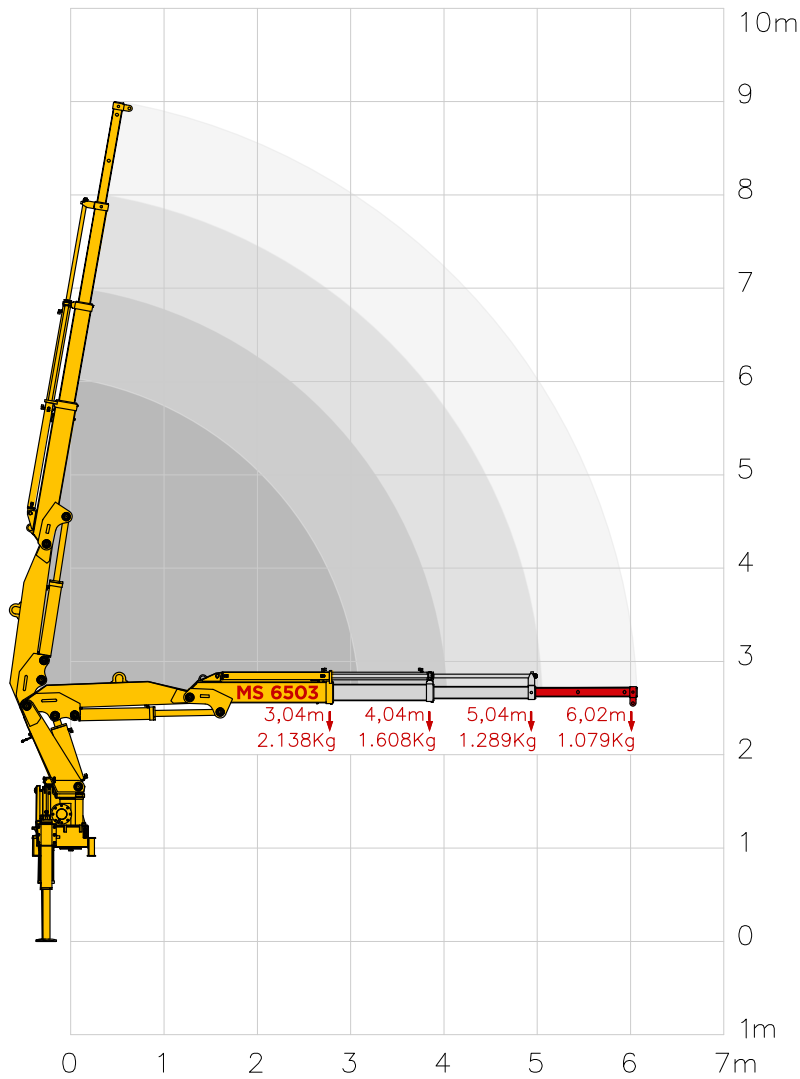

DIMENSIONS

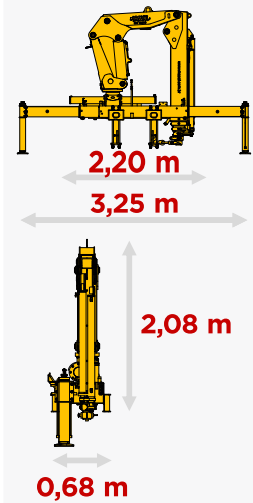

CHECK OUR WEBSITE



TECHNICAL SPECIFICATIONS

		MS 6503
1. Lifting moment capacity	kgf/m	6500
2. Maximum operating pressure	bar	180
3. Hydraulic reservoir capacity	L	117
4. Equipment weight	kg	1450
5. Number of hydraulic extensions		2
6. Quantity of manual extensions		1
7. Maximum capacity at maximum outreach	kg	1079
8. Maximum capacity at first handle	kg	2138
9. Maximum horizontal outreach	m	6,02
10. Maximum horizontal hydraulic outreach	m	5,04
11. Maximum vertical outreach	m	8,92
12. Maximum vertical hydraulic outreach	m	7,86
13. Width in folded position	m	2,20
14. Width stabilizer spread	m	3,25
15. Maximum opening angle	graus	80
16. Slewing angle	graus	360
17. Minimum lifting radius	m	1,50
18. Installation space needed	m	0,90
19. Slewing torque	kgf/m ton	1214
20. Dead weight		6,7

AVAILABLE COLORS

PATTERN

OPTIONS



KNOW OUR PRODUCTS LINES



OUR STRENGTH IS TRADITION

MASAL INDUSTRY

Headquarters - Rua Alfredo Caetano,
02 Santo Antônio da Patrulha
Rio Grande do Sul / Brazil

(51) 3662-3066
www.masal.com.br

MASAL