



MS 20600-S

LOAD CHART

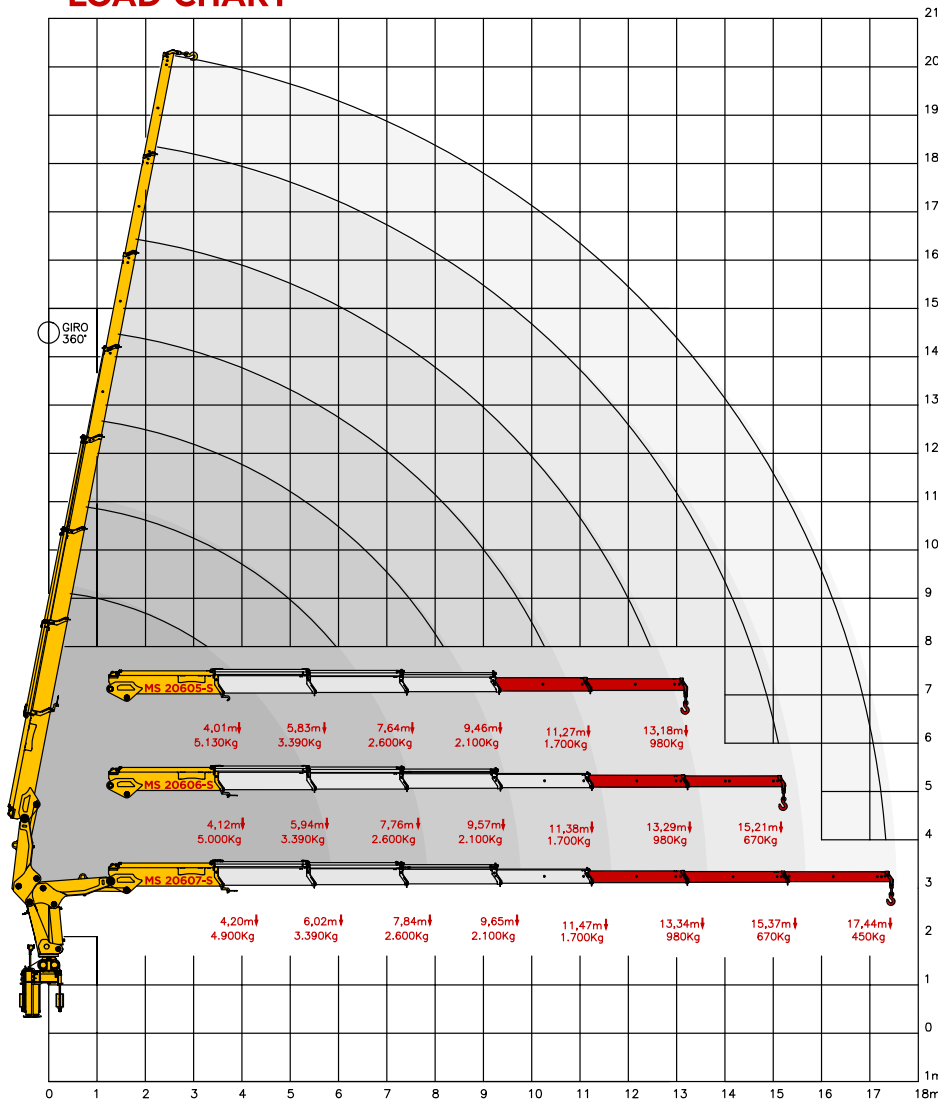

DIMENSIONS

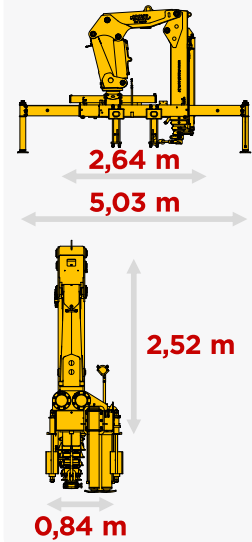

CHECK OUR WEBSITE



TECHNICAL SPECIFICATIONS

		MS 20605	MS 20606	MS 20607
1. Lifting moment capacity	kgf/m	20600	20600	20600
2. Maximum operating pressure	bar	200	200	200
3. Hydraulic reservoir capacity	L	117	117	117
4. Equipment weight	kg	2950	3050	3150
5. Number of hydraulic extensions		3	4	4
6. Quantity of manual extensions		2	2	3
7. Maximum capacity at maximum outreach	kg	980	670	450
8. Maximum capacity at first handle	kg	5130	5000	4900
9. Maximum horizontal outreach	m	13,18	15,21	17,44
10. Maximum horizontal hydraulic outreach	m	9,46	11,38	11,47
11. Maximum vertical outreach	m	16,04	18,45	20,40
12. Maximum vertical hydraulic outreach	m	12,30	14,40	14,40
13. Width in folded position	m	2,64	2,64	2,64
14. Width stabilizer spread	m	5,03	5,03	5,03
15. Maximum opening angle	graus	80	80	80
16. Slewing angle	graus	360	360	360
17. Minimum lifting radius	m	1,90	1,90	1,90
18. Installation space needed	m	1,00	1,00	1,00
19. Slewing torque	kgf/m	4830	4830	4830
20. Dead weight	ton	17	17	17

AVAILABLE COLORS

PATTERN

OPTIONS



KNOW OUR PRODUCTS LINES



OUR STRENGTH IS TRADITION

MASAL INDUSTRY

Headquarters - Rua Alfredo Caetano,
02 Santo Antônio da Patrulha
Rio Grande do Sul / Brazil

(51) 3662-3066
www.masal.com.br

MASAL