

Crane

MS 16000-S



**MAXIMUM HORIZONTAL
OUTREACH**
17,46 m



**MAXIMUM VERTICAL OUTREACH
FROM THE GROUND**
20,60 m



**SLEWING
ANGLE**
360°


Specifications - MS 16007-S

**MAXIMUM EXTENT
CAPACITY**
17,46 m




MASAL

LOAD CHART

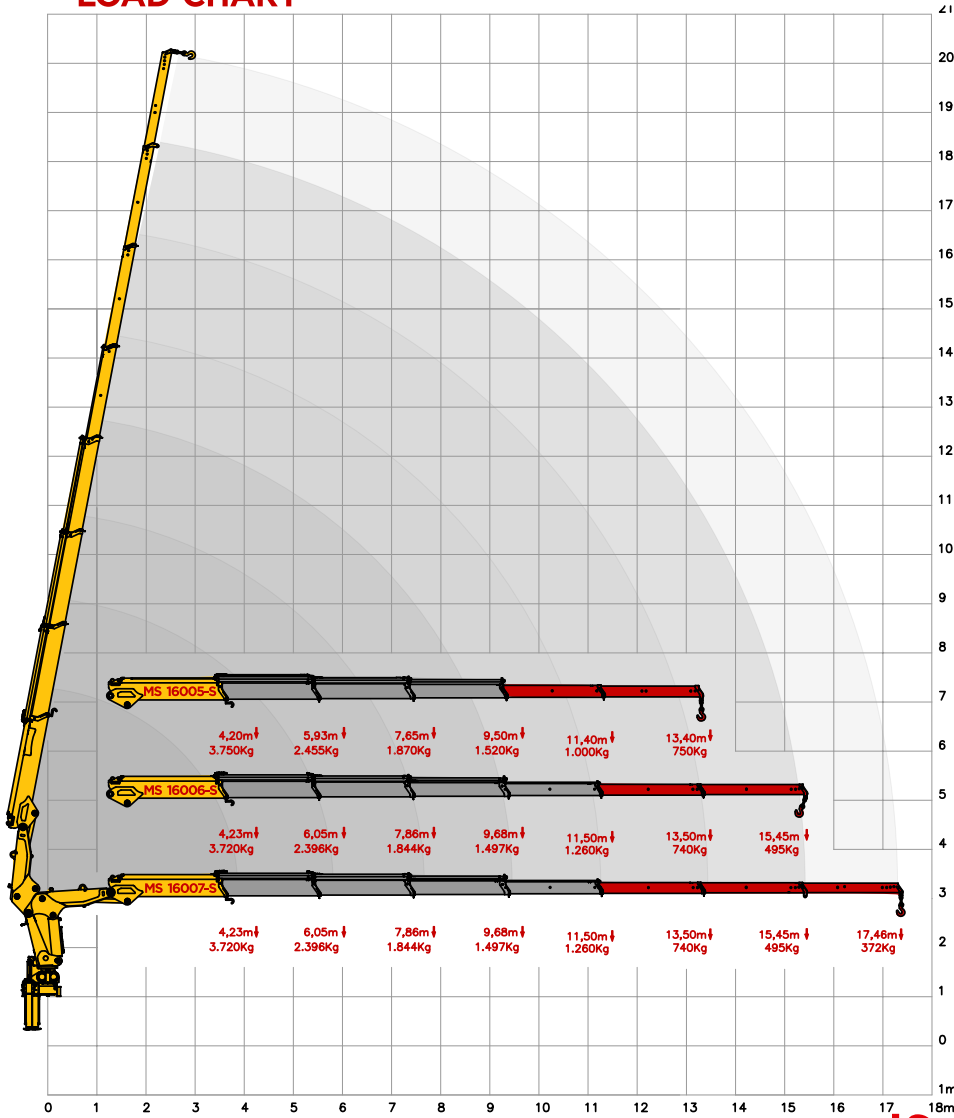


DIMENSIONS



2,60 m

4,98 m



2,45 m

0,80 m

CHECK OUR WEBSITE



TECHNICAL SPECIFICATIONS

		MS 16005-S	MS 16006-S	MS 16007-S
1. Lifting moment capacity	kgf/m	16000	16000	16000
2. Maximum operating pressure	bar	195	195	195
3. Hydraulic reservoir capacity	L	117	117	117
4. Equipment weight	kg	2700	2800	2900
5. Number of hydraulic extensions		3	4	4
6. Quantity of manual extensions		2	2	3
7. Maximum capacity at maximum outreach	kg	750	495	372
8. Maximum capacity at first handle	kg	3750	3720	3720
9. Maximum horizontal outreach	m	13,40	15,45	17,46
10. Maximum horizontal hydraulic outreach	m	9,50	11,50	11,50
11. Maximum vertical outreach	m	16,24	18,65	20,60
12. Maximum vertical hydraulic outreach	m	12,50	14,60	14,60
13. Width in folded position	m	2,60	2,60	2,60
14. Width stabilizer spread	m	4,98	4,98	4,98
15. Maximum opening angle	graus	80	80	80
16. Slewing angle	graus	360	360	360
17. Minimum lifting radius	m	1,90	1,90	1,90
18. Installation space needed	m	1,00	1,00	1,00
19. Slewing torque	kgf/m	4830	4830	4830
20. Dead weight	ton	15	15	15

AVAILABLE COLORS

PATTERN

OPTIONS



KNOW OUR PRODUCTS LINES



OUR STRENGTH IS TRADITION

MASAL INDUSTRY

Headquarters - Rua Alfredo Caetano,
02 Santo Antônio da Patrulha
Rio Grande do Sul / Brazil

(51) 3662-3066
www.masal.com.br

MASAL