


Crane MS 20000



MAXIMUM HORIZONTAL
OUTREACH
17,32 m

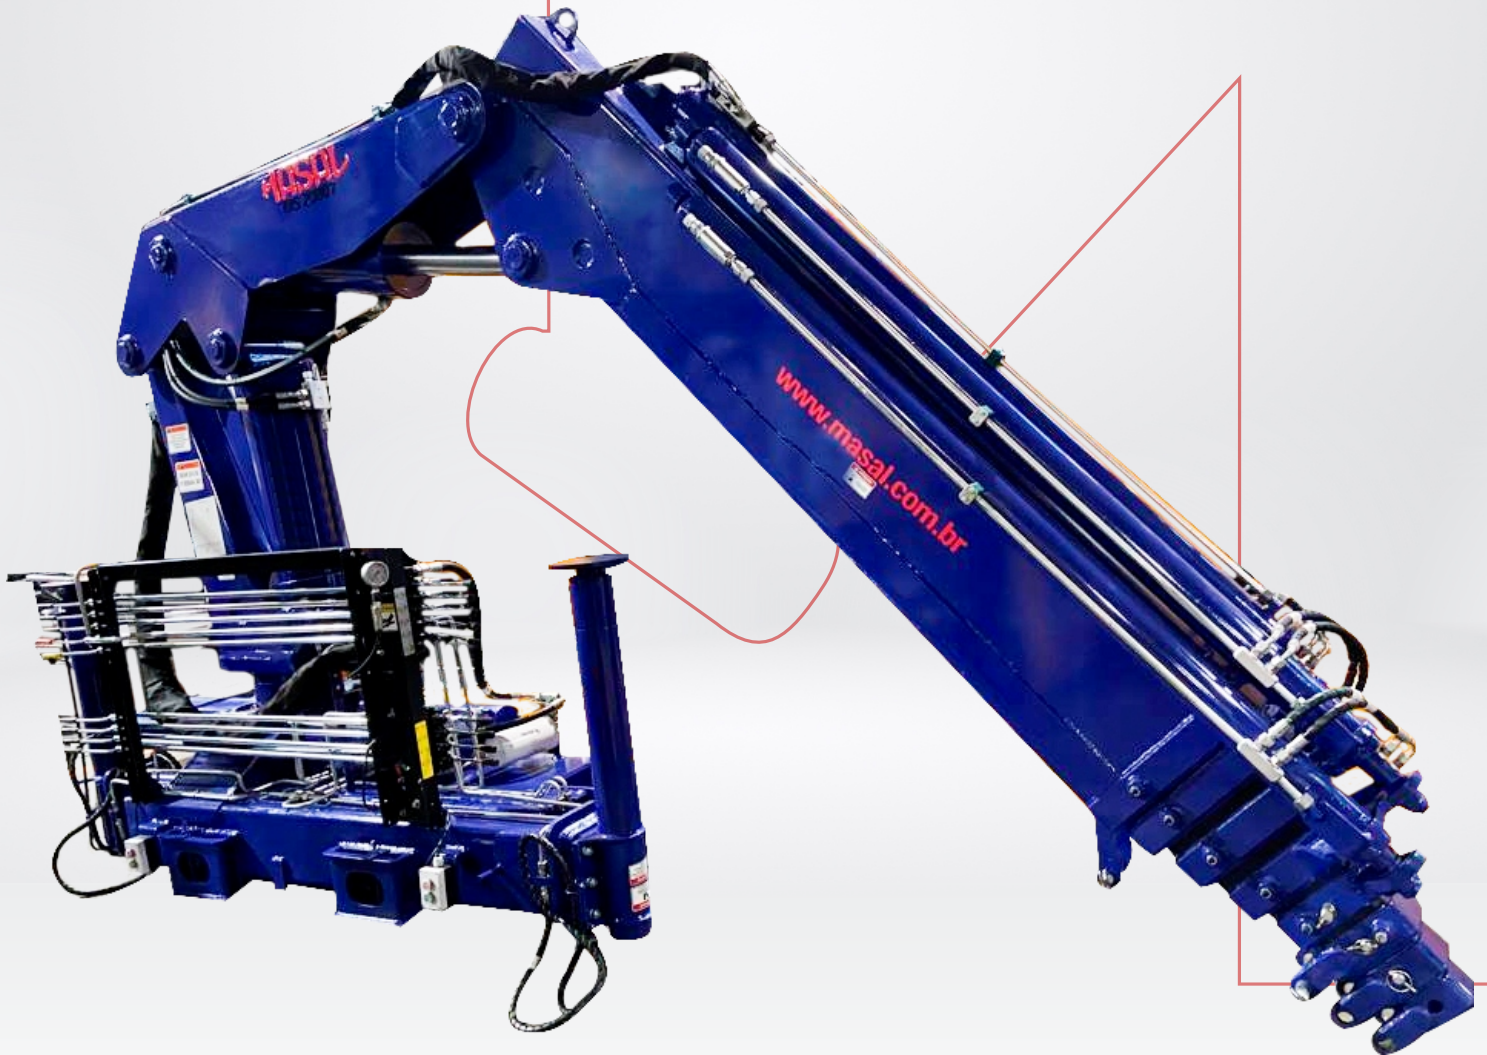

MAXIMUM VERTICAL OUTREACH
FROM THE GROUND
20,30 m



SLEWING
ANGLE
360°

Specifications - MS 20007


MAXIMUM EXTENT
CAPACITY

17,32 m





MASAL

LOAD CHART

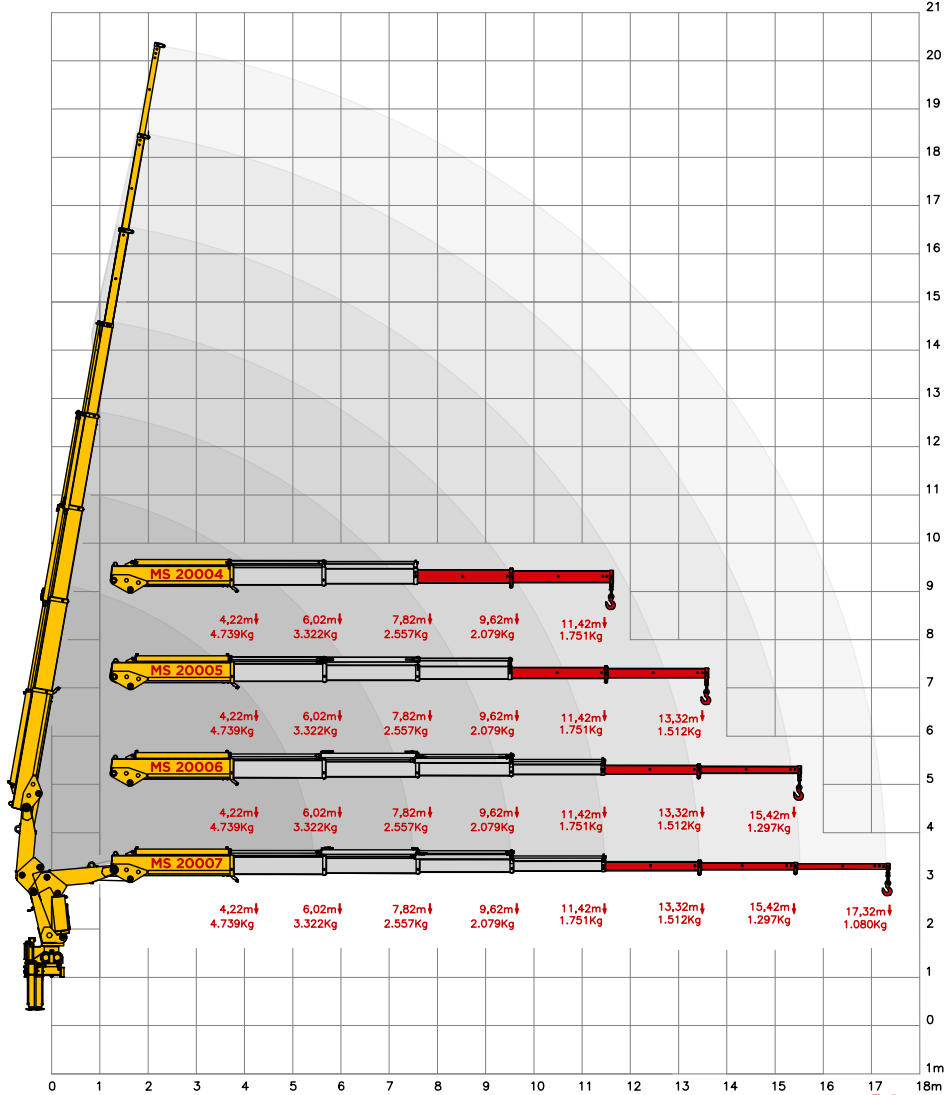

DIMENSIONS



CHECK OUR WEBSITE



TECHNICAL SPECIFICATIONS

		MS 20004	MS 20005	MS 20006	MS 20007
1. Lifting moment capacity	kgf/m	20000	20000	20000	20000
2. Maximum operating pressure	bar	180	180	180	180
3. Hydraulic reservoir capacity	L	117	117	117	117
4. Equipment weight	kg	3150	3400	3500	3650
5. Number of hydraulic extensions		2	3	4	4
6. Quantity of manual extensions		2	2	2	3
7. Maximum capacity at maximum outreach	kg	1751	1512	1297	1080
8. Maximum capacity at first handle	kg	4739	4739	4739	4739
9. Maximum horizontal outreach	m	11,42	13,32	15,42	17,32
10. Maximum horizontal hydraulic outreach	m	7,82	9,62	11,42	11,42
11. Maximum vertical outreach	m	14,45	16,45	18,40	20,30
12. Maximum vertical hydraulic outreach	m	10,80	12,60	14,50	14,50
13. Width in folded position	m	2,60	2,60	2,60	2,60
14. Width stabilizer spread	m	5,02	5,02	5,02	5,02
15. Maximum opening angle	graus	80	80	80	80
16. Slewing angle	graus	360	360	360	360
17. Minimum lifting radius	m	1,90	1,90	1,90	1,90
18. Installation space needed	m	1,10	1,10	1,10	1,10
19. Slewing torque	kgf/m	4684	4684	4684	4684
20. Dead weight	ton	17	17	17	17

AVAILABLE COLORS

PATTERN

OPTIONS



KNOW OUR PRODUCTS LINES



OUR STRENGTH IS TRADITION

MASAL INDUSTRY

Headquarters - Rua Alfredo Caetano,
O2 Santo Antônio da Patrulha
Rio Grande do Sul / Brazil

(51) 3662-3066
www.masal.com.br

MASAL