

Crane MC 15600



MAXIMUM HORIZONTAL
OUTREACH
15,00 m



MAXIMUM VERTICAL OUTREACH
FROM THE GROUND
18,60 m



SLEWING
ANGLE
415°


Specifications - MC 15606

MAXIMUM EXTENT
CAPACITY
15,00 m




MASAL

LOAD CHART

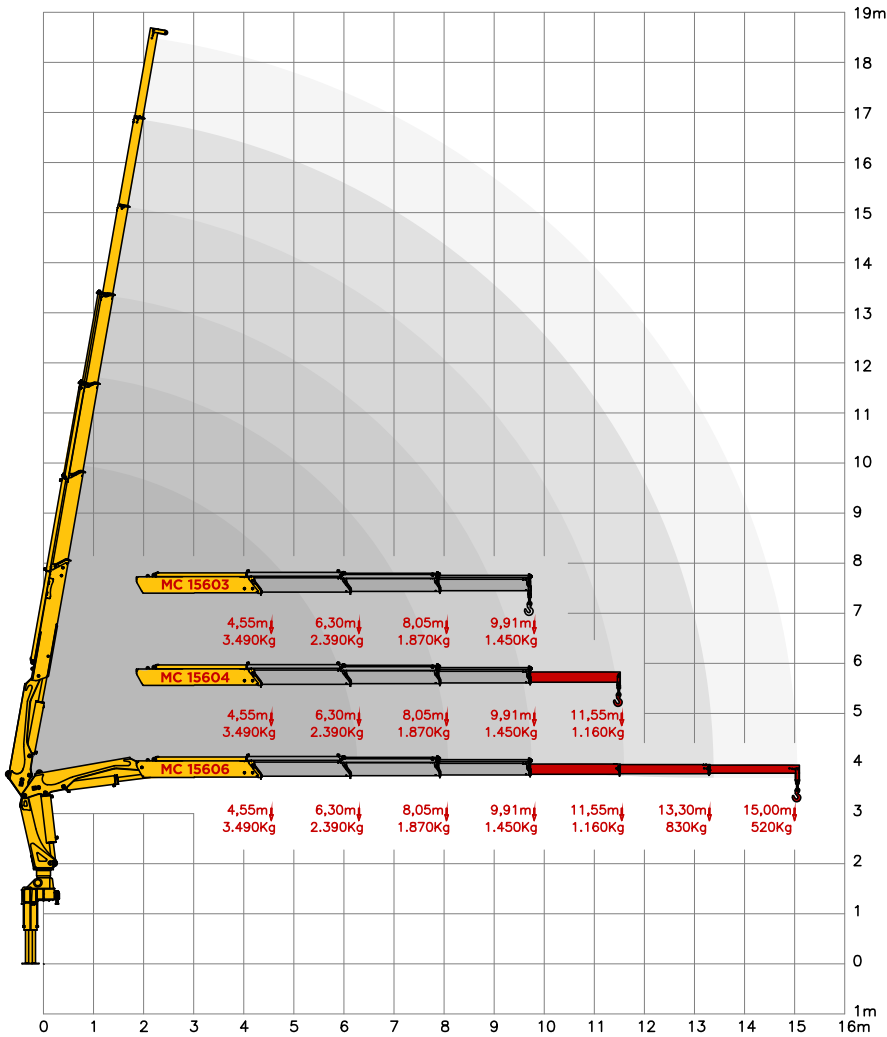

DIMENSIONS

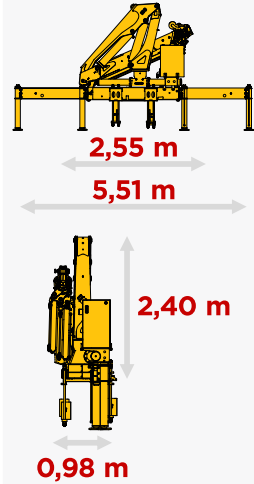

CHECK OUR WEBSITE



TECHNICAL SPECIFICATIONS

		MC 15603	MC 15604	MC 15606
1. Lifting moment capacity	kgf/m	15000	15000	15000
2. Maximum operating pressure	bar	230	230	230
3. Hydraulic reservoir capacity	L	130	130	130
4. Equipment weight	kg	2450	2520	2600
5. Number of hydraulic extensions		3	3	3
6. Quantity of manual extensions		0	1	3
7. Maximum capacity at maximum outreach	kg	1450	1160	520
8. Maximum capacity at first handle	kg	3490	3490	3490
9. Maximum horizontal outreach	m	9,91	11,55	15,00
10. Maximum horizontal hydraulic outreach	m	9,91	9,91	9,91
11. Maximum vertical outreach	m	13,35	15,10	18,60
12. Maximum vertical hydraulic outreach	m	13,35	13,35	13,35
13. Width in folded position	m	2,55	2,55	2,55
14. Width stabilizer spread	m	5,51	5,51	5,51
15. Maximum opening angle	graus	80	80	80
16. Slewing angle	graus	415	415	415
17. Minimum lifting radius	m	1,00	1,00	1,00
18. Installation space needed	m	1,18	1,18	1,18
19. Slewing torque	kgf/m	2877	2877	2877
20. Dead weight	ton	13	13	13

AVAILABLE COLORS

PATTERN

OPTIONS



KNOW OUR PRODUCTS LINES



OUR STRENGTH IS TRADITION

MASAL INDUSTRY

Headquarters - Rua Alfredo Caetano,
02 Santo Antônio da Patrulha
Rio Grande do Sul / Brazil

(51) 3662-3066
www.masal.com.br

MASAL